



Turn to the experts

## Carrier AquaSnap® 30MP Modular Chiller



16 to 550 Tons / 56 to 1,934 kW 50/60 Hz







## Efficient Custom Cooling for Retrofit or New Construction.

The Carrier AquaSnap® 30MP chiller delivers high-efficiency cooling customized to the precise requirements of your facility.

With a host of configuration options, the AquaSnap 30MP modular chiller is a snap to install, operate and control for years of quiet, reliable, cost-saving performance.

And thanks to its modular design, the 30MP chiller plant can match a facilities' present and future capacity requirements by adding modules as needed. It can also be field-assembled in limited-access mechanical rooms, so every new construction or retrofit project can benefit from years of Carrier reliability and performance.

## A Snap to Install.


### Simple Set-Up

In addition to its compact footprint, features and options simplifying installation include:

- Mobility Kit Option
- Standard Evaporator Flow Switch
- Water Manifold Option
- Height Adjustment Kit Standard
- Low Sound Option(s)
- Automatic Isolation Valve Option
- Head Pressure Control Option

### Single-Point Power

Individual power feeds allow for partial capacity.

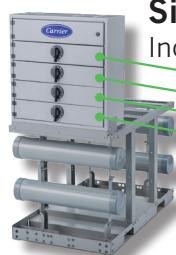

*Optional  
Electrical  
Distribution  
Panel*



*The AquaSnap 30MP chiller's modular and compact design facilitates efficient, cost-saving installation and configuration.*

### Load Matching


With 11 sizes to choose from, modules can be mixed and matched to meet your application-specific load.

## A Snap to Operate.

### Medium Temperature Brine Application

Unit may be factory-modified to permit brine operation from 15° to 32°F (-9.4° to 0.0°C) leaving brine temperature.

Refrigeration circuit components, such as the expansion device and liquid line solenoid, are modified to permit low refrigerant flow rates typical of brine duty operation.

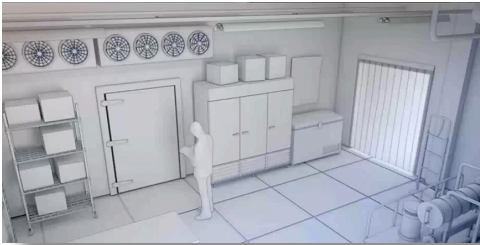

### Heat Recovery Application<sup>1</sup>


Allows for transferring heat energy from sources that do not perform any useful work in a chiller plant to spaces where utilization of this heat may result in significant energy savings for the facility.

With up to 140°F (60°C)<sup>2</sup> leaving condenser water temperature, the 30MP is great for applications such as reheat, process, and domestic water heating.



### Remote Air-Cooled Application

In applications where air-cooled chillers create installation, maintenance or sound issues, a condenserless 30MPA option is available. Moving the evaporator and compressor inside reduces the chiller footprint, eliminates the need for glycol, and reduces outdoor sound levels.

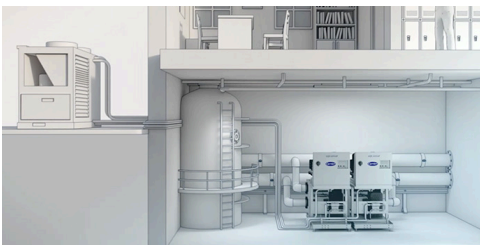

### 15HP Circuit Option


All 30MPW models meet the minimum efficiency requirements of ASHRAE 90.1-2016. Select models (016 & 032) were designed to not to exceed 15 HP per refrigerant circuit, a key code requirement in certain municipalities.



## A Snap to Control.

### Digital Scroll Compressors

Digital scroll compressors are available as a factory-installed option. These compressors allow incremental unloading with capacity modulation to better match building load when compared to standard scroll compressors. (16 to 45 ton units<sup>3</sup>)

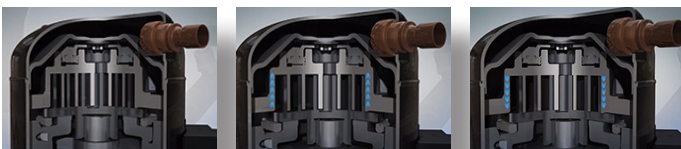

Loaded  
(Full Capacity)

Unloaded  
(Zero Capacity)

Loaded  
(Full Capacity)

*The Digital Scroll Compressor option allows the chiller to match building load without cycling the compressor on and off. It operates by internally unloading the compressor, simply separating the scroll elements while maintaining shaft rotation.*

### Multi-Unit Controller

Allows for chiller operation of up to eight 30MP modules in a single plant.

Factory programming allows for plug-and-play set-up and configuration.



<sup>1</sup> Option available where applicable

<sup>2</sup> The 016 & 032 models are capable of producing up to 110F (43.3C) & 104F (40C) leaving condenser water, respectively.

<sup>3</sup> Units without multi-unit controller option

# Carrier AquaSnap® 30MP Modular Chiller



## AquaSnap® 30MP Module Dimensions<sup>1</sup>

Module	L (Inches)	W (Inches)	H <sup>2</sup> (Inches)
016 - 045	55	32	62.5
050 - 071	55	32	66.3
Distribution Panel	55	32	70.25

<sup>1</sup> Dimensions reflect Single Modules with no Options.

<sup>2</sup> Add 4" (Inches) to Height for Mobility Kit Option.



## SEISMICOMPLIANT

\*Meets IBC 2006, ASCE-7-05, CBC 2007, and OSHPD seismic requirements (select models)

Water cooled chillers within the scope of the AHRI WCCL certification program are certified in accordance with the AHRI Water-Cooled Water-Chilling and Heat Pump Water-Heating Packages Certification Program, which is based on AHRI Standard 550/590 (I-P) and AHRI Standard 551/591 (SI). Certified units may be found in the AHRI Directory at [www.ahridirectory.org](http://www.ahridirectory.org). Condenserless versions of these units are not certified under the AHRI certification program.

## 30MP Benefits at a Glance

### For Building Owners and Managers

- Snap to Install, Operate and Control
- Quiet, Reliable Operation
- Building Automation System Compatible
- Environmentally Sustainable Refrigerant
- 15 Hp/Circuit Option

### For Consulting Engineers

- ASHRAE 90.1 Compliant
- Ideal for Retrofit, Replacement or Building Expansion Project
- Seismic Compliant
- Head Pressure Control

### For Contractors

- Factory Operational Testing
- Low Installation Costs
- Compact Footprint
- Thermowells, Schrader Valves Standard
- Factory installed Automatic Isolation Valve option



Turn to the experts

[carrier.com/commercial](http://carrier.com/commercial)